



Ferrari GTC4Lusso Install Tips


Important Note:

Installation tips generated from personal feedback from customers. Results are not guaranteed and are provided as a suggestion only.


This document is specific to the GTC4Lusso.

Accessing the Vacuum Solenoid Valves

- Start by removing the floor panel in the luggage compartment. This panel has cut-outs for holding various tools and the small tire inflation pump.
- The vacuum solenoids are located behind the rear bumper. To access the solenoid valves, remove the rear diffuser. Once the diffuser is removed, you can reach up and behind the rear bumper to access the valves. You do not need to remove the rear wheels nor the rear wheel liner panels.
- Place the car on a lift and remove the rear diffuser which is removed by taking off several Torx screws.
- This next photo shows the location of the two vacuum solenoid valves. The rear bumper is removed to clearly show the location.

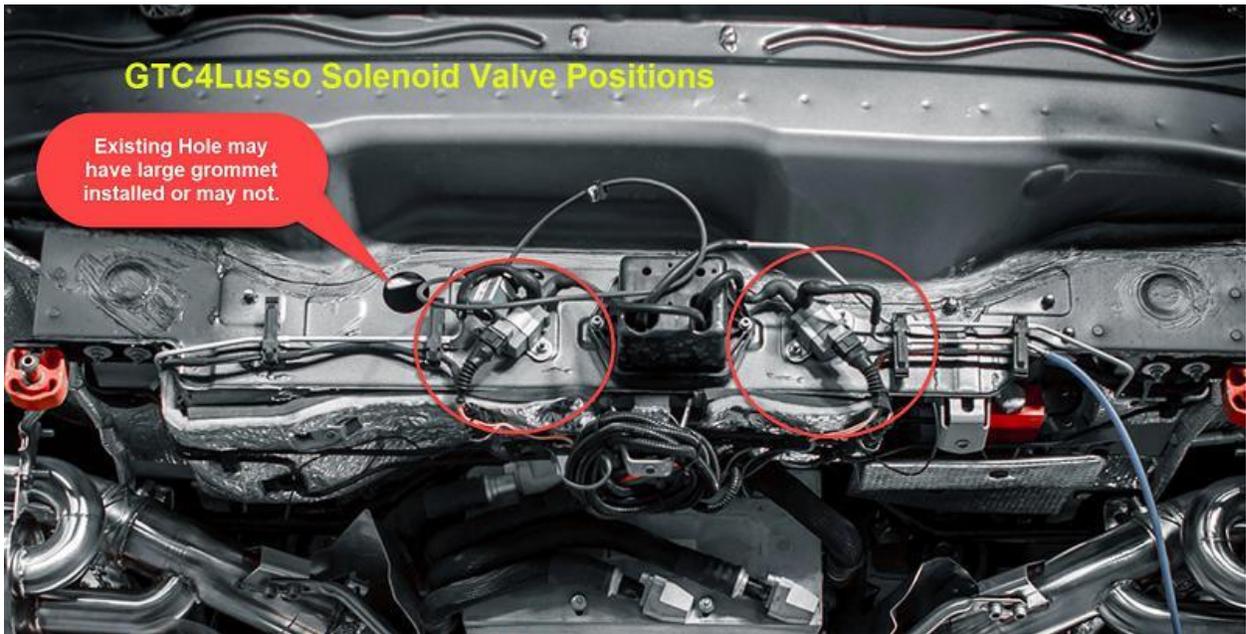


- Once the rear diffuser is removed, you will have access to reach up and behind the rear bumper to access the vacuum solenoid valves.

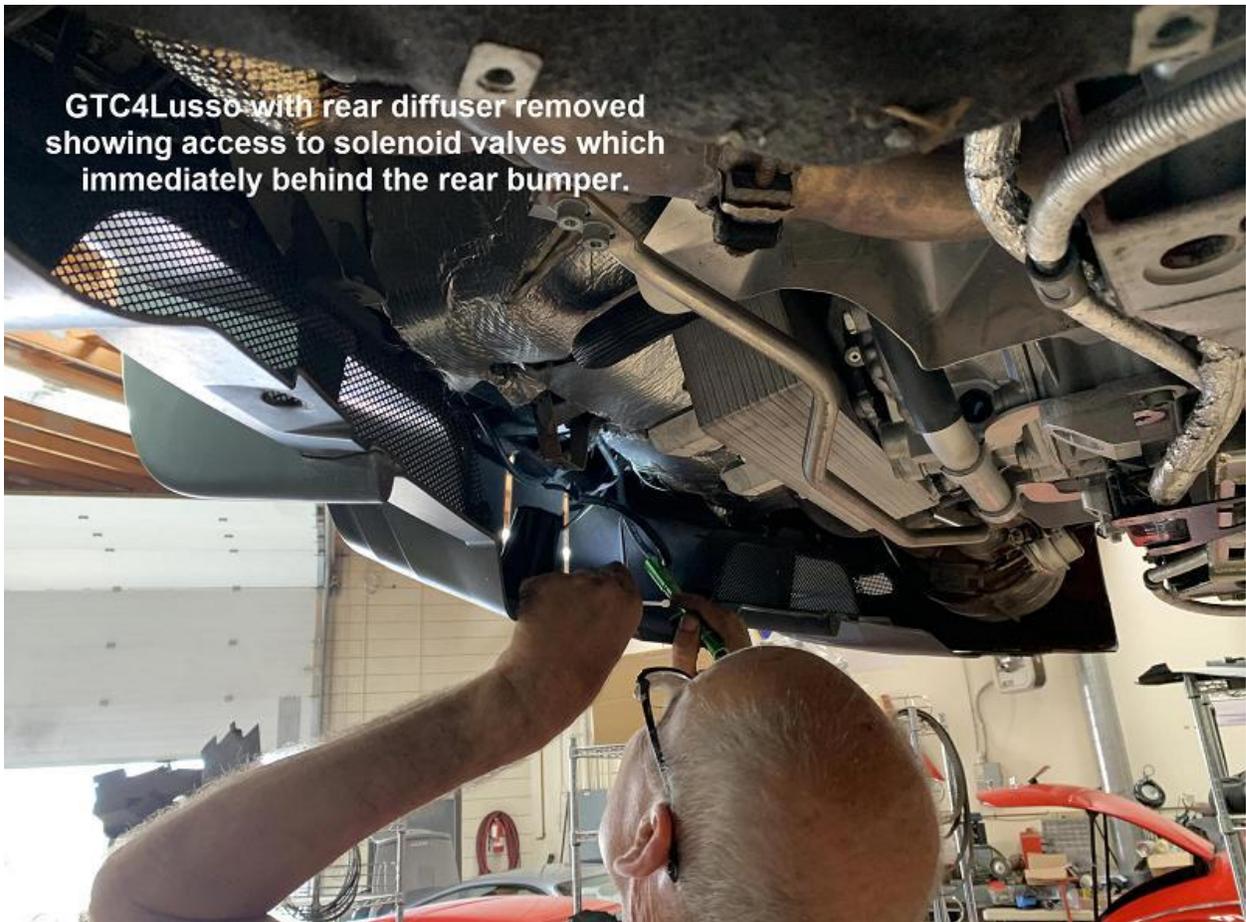

- Disconnect the cables that are currently connected to the vacuum solenoid valves. Connect the two Forza Y-Cables to the vacuum solenoid valves and to

the existing cables. Route the end of the Forza connection cables through the large hole noted in the top photo into the well in luggage compartment. The large hole may or may not have an existing rubber grommet. If it does not, make sure you provide a level of protection for the cables that you will be routing through that hole.

- You do not need to secure the controller module to the sides of the well. In this case, the controller module is placed on top of the foam in the upper left of the well. When the floor panel is re-installed, it will compress on top of the controller module and it will be secured in place.

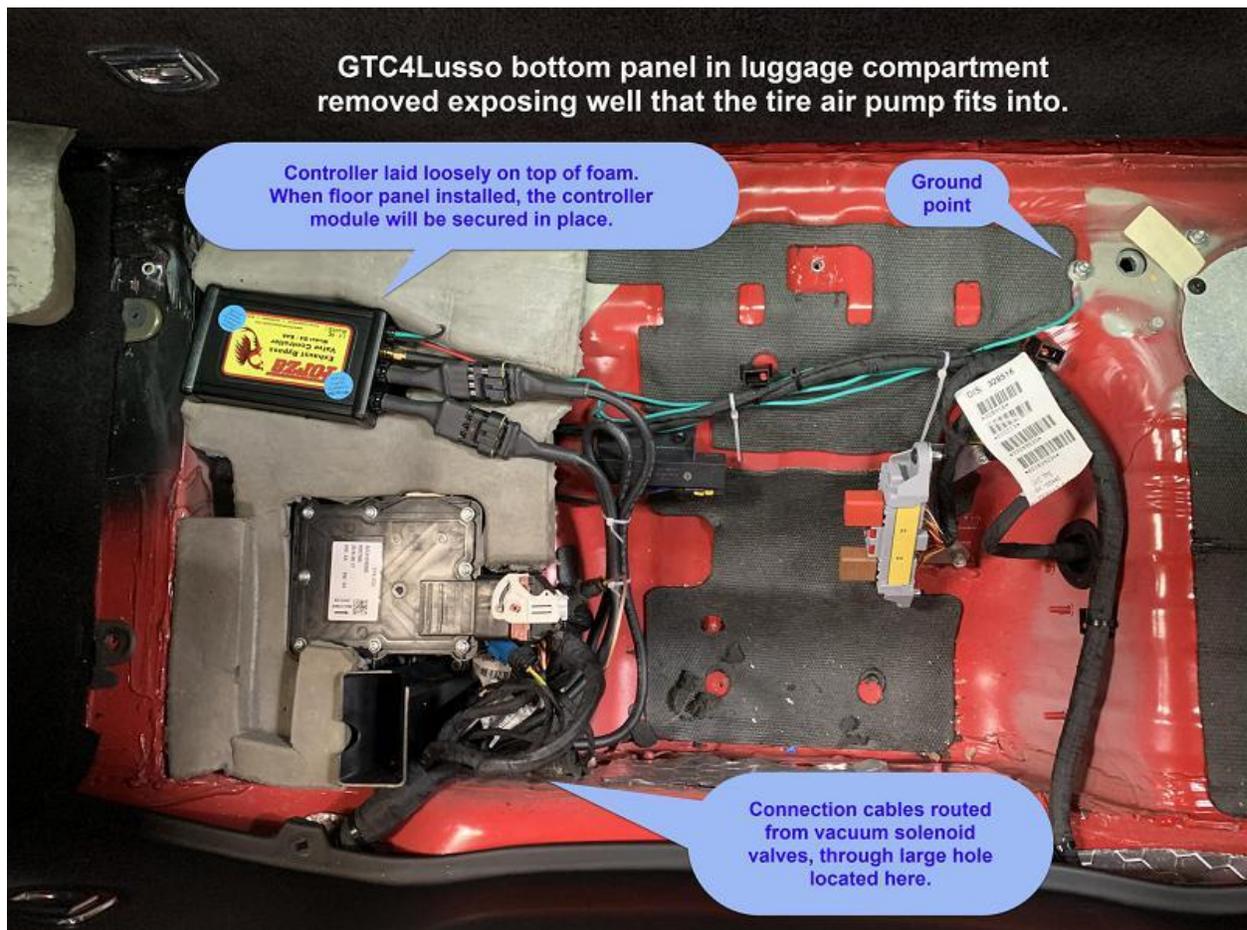

- Before re-installing floor panel, turn on ignition and verify LED is illuminated on side panel. Start the car the test controller function.
- Re-install floor panel in floor of luggage compartment.
- Re-install rear diffuser.