




Aston Martin Vanquish Install Tips

Important Note:


Installation tips generated from personal feedback from customers. Results are not guaranteed and are provided as a suggestion only.

Accessing the Vacuum Solenoid Valves


Locate the vacuum solenoid valve. It is as the rear in the bumper area.

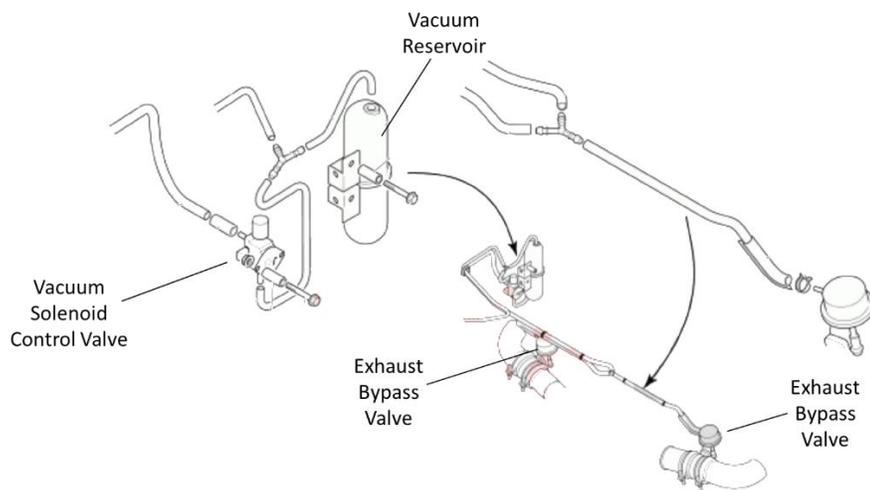


- Remove right rear wheel, then remove four screws holding wheel liner in place.

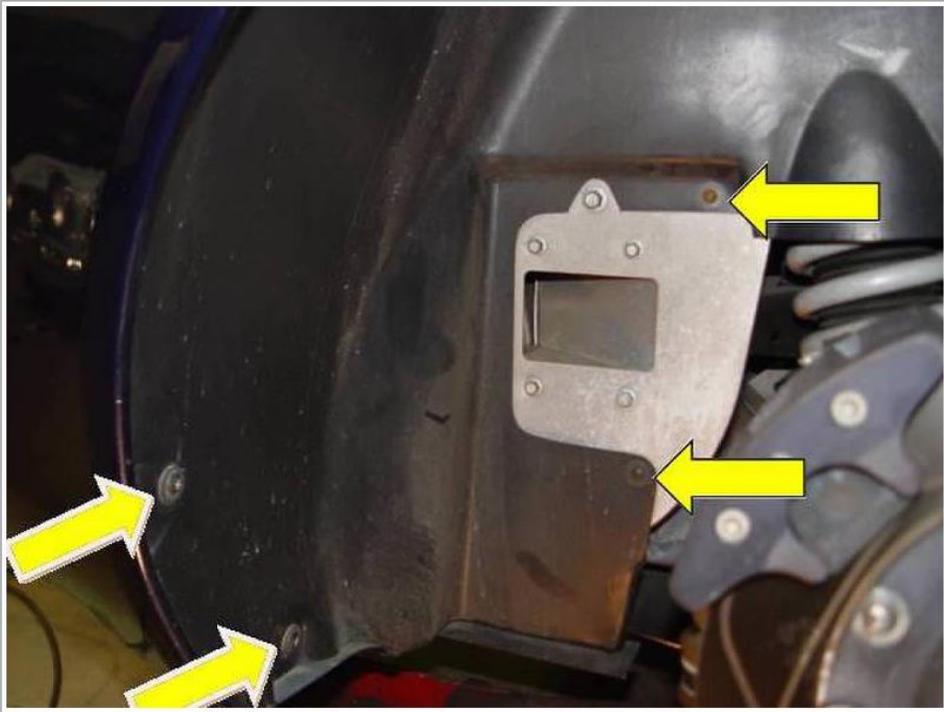

- Pull back the liner to access the vacuum solenoid valve

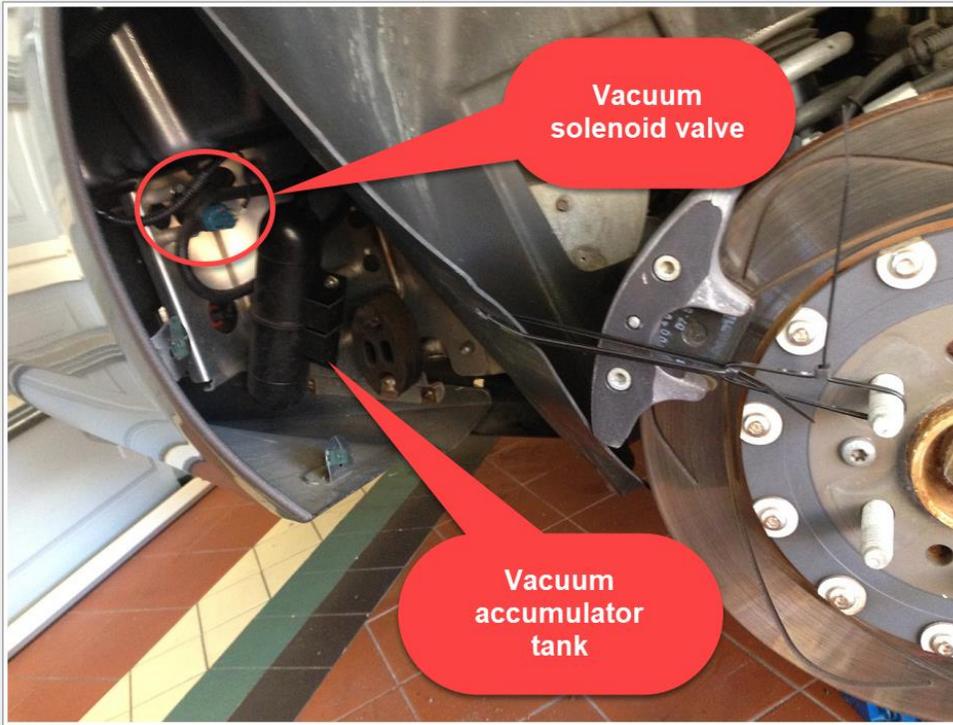

- Disconnect the existing cable from the vacuum solenoid valve.

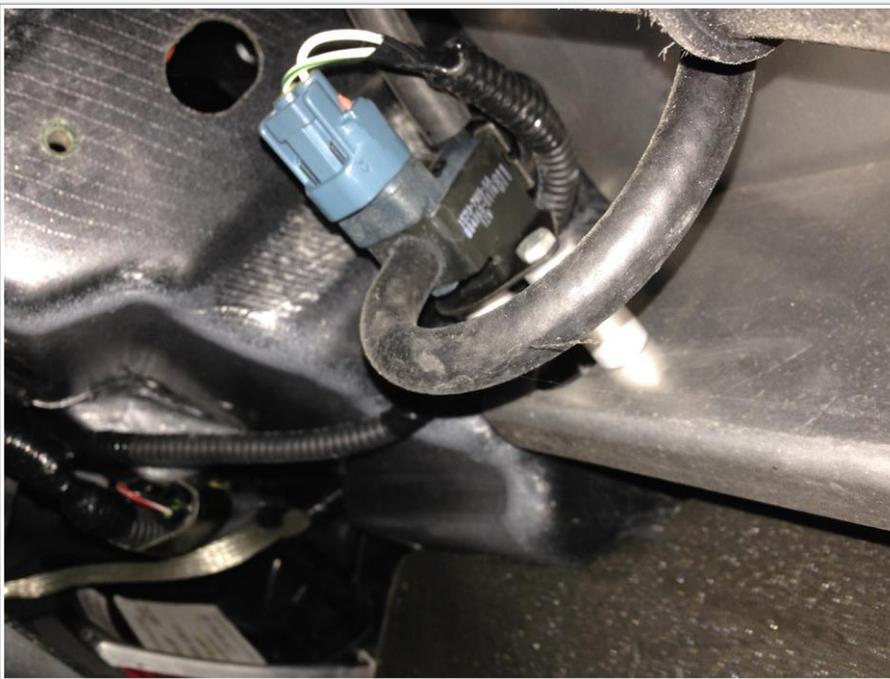

Connect adapter plugs to both the existing cable connector and the plug on the vacuum solenoid valve.



Route the Forza Connection into the Luggage Compartment

Looking up from the vacuum solenoid valve toward the luggage compartment you should notice an unused grommet to give easy access into the luggage compartment.

Remove the first aid kit inside the trunk ... should be on right hand side.



Remove the clip and pull the carpet back.

The grommet noted above should be at the bottom of the trunk well.



Make a radial cut in the grommet, then place over the Forza connection cable. Route the cable through the hole and reposition the grommet.

Temporarily attach the controller to a good ground. Turn on the ignition and test the function of the controller. If OK, then find a good location for the controller module. Recommend you consider mounting the controller module on the fuse box located in the luggage compartment.



Finding a good ground point in the luggage compartment well might be a challenge as it is likely made of carbon fiber. Look for a screw or other connection point on the aluminum chassis. You should be able to find a good ground with a bit of looking. Connect the Forza Y-Cable to the adapter plugs and reinstall everything that you removed to get access.